

# Process Analysis Systems

Chem

Energy

Pharm

Food

Water

## Stratos® Eco 2405 Oxy

### Dissolved-Oxygen Measurement

Simultaneous display of measured value and temperature; unit symbols shown in plain text. Icons supply operating messages

and signal unusual operating states. Mode indicators show the current operating mode.



#### Suitable sensors

- customary amperometric sensors with (e.g. -675 mV) or without polarization voltage
- temperature sensors NTC 22 kohms, NTC 30 kohms

#### Recommended Installation Sets

##### • Flow

SE 703 ARF 201  
ZU 0323



##### • Inline

SE 703 ARF 101



##### • Immersion

SE 703 ARD 230



## Product Line

Order No.

### Stratos® Eco 2405 Oxy

process analyzer for measuring dissolved oxygen

**2405 Oxy**

## Mounting Accessories (see page 542)

Order No.

Pipe-mount kit

**ZU 0274**


Panel-mount kit

**ZU 0275**

Protective hood

**ZU 0276**

## Connection

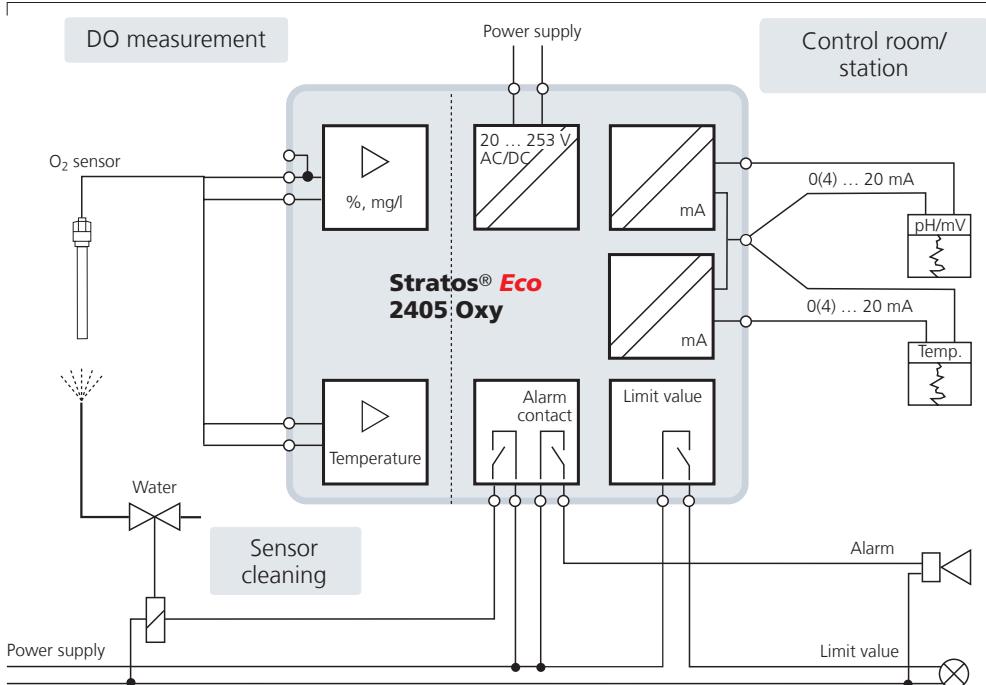

## Terminal Assignments

20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
24 to 230 V ac/dc		clean	o	alarm	o	do not connect	rel. 1	o	out 2	+	out 1	-	+	do not connect					
power																			
MAX. RELAY CONTACT RATING: AC < 250 V / < 3 A / < 750 VA, DC < 30 V / < 3 A / < 90 W, RESISTIVE																			
WARNING - EXPLOSION HAZARD - DO NOT DISCONNECT EQUIPMENT UNLESS POWER HAS BEEN SWITCHED OFF OR THE AREA IS KNOWN TO BE NON-HAZARDOUS.																			
WARNING - BONDING BETWEEN CONDUIT IS NOT AUTOMATIC AND MUST BE PROVIDED AS PART OF THE INSTALLATION. SEE INSTALLATION INSTRUCTIONS.																			
WARNING - SUBSTITUTION OF COMPONENTS MAY IMPAIR SAFETY.																			
WARNING - CLEAN ONLY WITH ANTISTATIC MOISTENED CLOTH.																			
CAUTION - USE SUPPLY WIRES SUITABLE FOR 30°C ABOVE SURROUNDING AMBIENT AND RATED AT LEAST 250 V. USE SIGNAL WIRES SUITABLE FOR AT LEAST 250 V.																			
AVERTISSEMENT - RISQUE D'EXPLOSION - AVANT DE DECONNECTER L'EQUIPEMENT, COUPER LE COURANT OU S'ASSURER QUE L'EMPLACEMENT EST DESIGNÉ NON DANGEREUX.																			
NI, CL1, DIV2, GPA, B, C, D, T4										NI, CL1, ZN2, GPIC, T4									
CL1 DIV2 GPA, B, C, D, T4										Ex nA IIIC T4 CSA 1342049									
Control Dwg. 194.130-330										ENCLOSURE TYPE 2									
Tamb -20 to +55 °C																			
75433/0000000										F-2405OXY									

# Process Analysis Systems

Chem Energy Pharm Food Water

## Stratos® Eco 2405 Oxy

### Specifications

#### O<sub>2</sub> input

Measuring current

-2 ... +1800 nA

Resolution (at V<sub>pol</sub> ≤ 800 mV  
and V<sub>ref</sub> ≤ 200 mV)

0.05 nA

Saturation (-10 ... +80 °C)

0 ... 200%

Measurement error<sup>1, 2, 3)</sup>

0.5 % meas.val. + 0.5 %

Concentration  
(-10 ... +80 °C)

0.00 ... 20.00 mg/l  
0.00 ... 20.00 ppm

Measurement error<sup>1, 2, 3)</sup>

0.5 % meas.val. + 0.05 mg/l (0.05 ppm)

Permissible guard current

≤ 20 µA

Polarization voltage\*)

0 ... 1000 mV      -1000 ... 0 mV

Process pressure\*)

0.000 ... 9.999 bars (... 999.9 kPa/... 145.0 PSI)

Salinity correction\*)

00.00 ... 45.00 g/kg

#### Sensor standardization

Operating modes

O<sub>2</sub> saturation (automatic)      O<sub>2</sub> concentration (automatic)  
product calibration, zero calibration

Calibration range

zero      ±2 nA

slope      25 ... 130 nA (at 25 °C, 1013 mbars)

Calibration timer\*)

0000 ... 9.999 h

Pressure correction\*)

0.000 ... 9.999 bars/999.9 kPa/145.0 PSI

#### Sensocheck®

monitoring for short circuits/open circuits (can be disabled)

#### Sensoface®

provides information on the sensor condition (evaluation of zero/slope, response time, calibration interval, Sensocheck®)

#### Temperature input\*)

NTC 22 kohms/NTC 30 kohms, 2-wire connection, adjustable

Measuring range

-20.0 ... +150.0 °C/-4 ... +302 °F

Adjustment range

10 K

Resolution

0.1 °C/1 °F

Measurement error<sup>1, 2, 3)</sup>

< 0.5 K (< 1 K at > 100 °C)

**Specifications – continued**

<b>Output 1</b>	0/4 ... 20 mA, max. 10 V, floating (galvanically connected to output 2)
Measured variable*)	O <sub>2</sub> saturation/O <sub>2</sub> concentration
Overrange*)	22 mA in the case of error messages
Output filter*)	low-pass, filter time constant 0 ... 120 s
Measurement error <sup>1)</sup>	< 0.3 % current value + 0.05 mA
Start/end of scale	as desired within range
Span allowed	5 ... 200 %/0.5 ... 50 mg/l (ppm)
<b>Output 2</b>	0/4 ... 20 mA, max. 10 V, floating (galvanically connected to output 1)
Measured variable	temperature
Overrange*)	22 mA in case of temp error messages
Output filter*)	low-pass, filter time constant 0 ... 120 s
Measurement error <sup>1)</sup>	< 0.3 % current value + 0.05 mA
Start/end of scale	-20 ... +150 °C / -4 ... +302 °F
Span allowed	20 ... 170 K/36 ... 306 °F
<b>Alarm contact</b>	relay contact, floating
Contact ratings	AC < 250 V / < 3 A / < 750 VA      DC < 30 V / < 3 A / < 90 W
Contact response	N/C (fail-safe type)
Response delay	10 s
<b>Limit contact</b>	relay contact, floating
Contact response*)	AC < 250 V / < 3 A / < 750 VA      DC < 30 V / < 3 A / < 90 W
Delay*)	N/C or N/O
Setpoints*)	0000 ... 9999 s
Hysteresis*)	within selected range
<b>Cleaning contact</b>	0.00 ... 5.00 pH / 0 ... 500 mV
Contact response*)	"clean" relay contact
Rinsing interval*)	AC < 250 V / < 3 A / < 750 VA      DC < 30 V / < 3 A / < 90 W
Rinse duration*)	N/C or N/O
	0000.0 ... 999.9 h (000.0 h = cleaning function switched off)
	0000 ... 1999 s

# Process Analysis Systems

Chem Energy Pharm Food Water

## Stratos® Eco 2405 Oxy

### Specifications – continued

<b>Display</b>	LC display, 7-segment with icons
Main display	character height 17 mm, unit symbols 10 mm
Secondary display	character height 10 mm, unit symbols 7 mm
Sensoface®	3 status indicators (friendly, neutral, sad face)
<b>Mode indication</b>	4 mode indicators "meas", "cal", "alarm", "config" further icons for configuration and messages
Alarm indication	red LED in case of alarm
<b>Keypad</b>	5 keys: [cal] [conf] [▶] [▲] [enter]
<b>Service functions</b>	
Current source	current specifiable for output 1 and 2 (00.00 ... 22.00 mA)
Device self-test	automatic memory test (RAM, FLASH, EEPROM)
Display test	display of all segments
Last error	display of last error occurred
Sensor monitor	display of direct, uncorrected sensor signal (electrode)
<b>Data retention</b>	parameters and calibration data > 10 years (EEPROM)
<b>Protection against electric shock</b>	protective separation of all low-voltage circuits against mains by double insulation to EN 61010-1
<b>Power supply</b>	24 (-15 %) ... 230 (+10 %) V AC/DC approx. 5 VA/2.5 W AC: 45 ... 65 Hz overvoltage category II, Class II
<b>Nominal operating conditions</b>	
Ambient temperature	-20 ... +55 °C
Transport/Storage temp	-20 ... +70 °C
Relative humidity	10 ... 95 %, not condensing
<b>EMC</b>	EN 61326-1, EN 61326-2-3 emitted interference: Class B (residential area)      Class A: for mains > 60 V DC immunity to interference: Industry
<b>Explosion protection</b>	FM      NI, Class I Div 2, Groups A, B, C & D T4, $T_a = 55$ °C; Type 2 NI, Class I Zone 2, Group IIC T4, $T_a = 55$ °C; Type 2 CSA      Class I Div 2, Groups A, B, C and D, T4 Ex nA IIC T4

**Specifications – continued**

<b>Enclosure</b>	molded enclosure made from PBT (polybutylene terephthalate)
Color	bluish gray, RAL 7031
Assembly	<ul style="list-style-type: none"> <li>– wall mounting</li> <li>– pipe mounting ZU 0274, Ø 40 ... 60 mm, □ 30 ... 45 mm</li> <li>– panel mounting ZU 0275</li> </ul> <p>cutout to DIN 43 700, sealed against panel</p>
Dimensions (mm)	H x W x D: 144 x 144 x 105
Ingress protection	IP 65/NEMA 4X
Cable glands	<p>3 knockouts for cable glands M20 x 1.5</p> <p>2 knockouts for 1/2" NPT or rigid metallic conduit</p>
Weight	approx. 1 kg

<sup>\*)</sup> user-defined

<sup>1)</sup> to IEC 746 Part 1, at nominal operating conditions

<sup>2)</sup> ±1 count

<sup>3)</sup> plus sensor error